


The Aluminum Composite Panel Grooving & Cutting Machine adopts special imported hard alloy blades and tools, featuring superb high-speed balance performance, high processing precision and durability, saving time and energy. It is capable of grooving and cutting, capable of horizontal and vertical cutting, and with safety positioning. The overall machine is of superior rigidity, with stable cutting, without vibration traces.

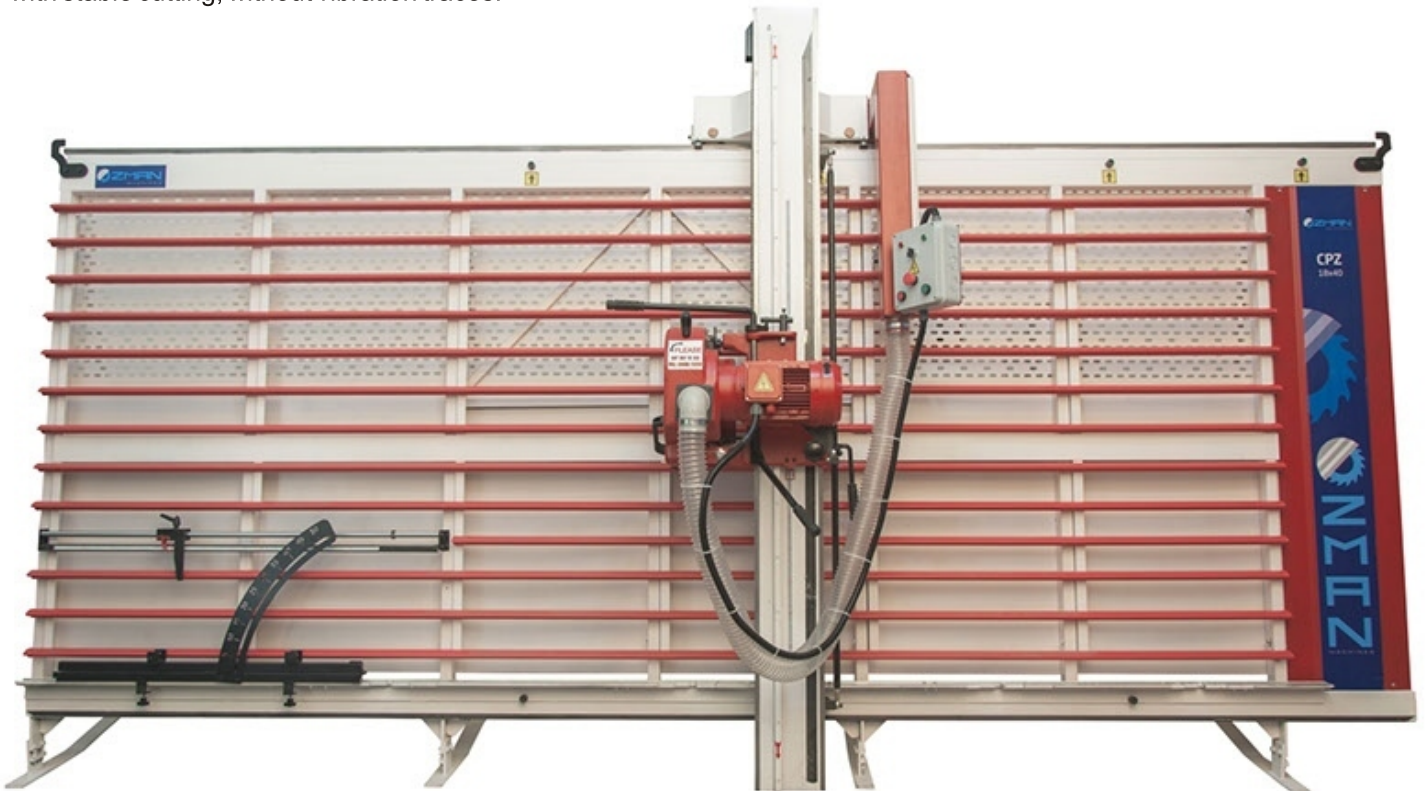

CPZ 18 x 40 Specifications

MADE IN EUROPE

- Motor Power: 4hp 3kW
- Mains Connection: 3 phase 380 V 50 Hz
- Rotation: 3000 rpm
- Main Blade Rotation: 6000 rpm
- Grooving Blade Rotation: 6000 rpm
- Maximum Cutting Depth: 45 mm
- Maximum Vertical Cutting Height : 1800 mm
- Maximum Horizontal Cutting Height: 1600 mm
- Maximum Cutting Length: 4000 mm
- Cutting Blade Size: 200 x 30 x 2.8mm
- Grooving Blade Size: 200 x 30 Z13
- Fiber Guide Size: 194 x 10 mm
- Standard Grooving Depth: 3.2 mm
- Panel Size (W x H x D): 5000 mm x 2500 mm x 1150 mm
- Shipping Dimensions: 4600 mm x 2200 mm x 1350 mm
- Weight: 650 kg

The specifications and illustrations in this catalogue are only a guide, Dynamic Machines Services Sdn Bhd therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons.