



Electro-pneumatic cutting-off machines, single head, retractable blade, with automatic blade advancement and inclination. Designed to perform rh and lh cuts at 20°. Controlled positioning system for intermediate positions on aluminium section bars.


**TECHNICAL CHARACTERISTICS**

Disk Ø 550 mm  
 Three phase motor  
 220/380 V 50 Hz  
 Oil mist pneumatic lubrication  
 Regulating depth of the cut  
 Operating pressure: 6-8 atm

**THE MACHINE INCLUDES:**

- Full protection
  - Disk Ø 550 mm
  - Service spanners
- OPTIONAL:**
- Single phase motor
  - Vertical vice


**Overall dimensions:**  
 1100 x 1570 x 1600 h mm.



**Weight** 500 Kg approx.

**THE MACHINE IS EQUIPPED WITH SAFETY DEVICES TO ELIMINATE ALL DANGERS TO THE OPERATOR**

*Data, description, and illustrations are for indication only.*

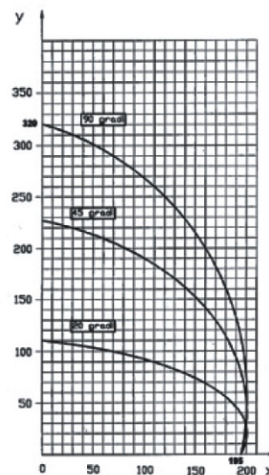

The specifications and illustrations in this catalogue are only a guide, Dynamic Machines Services Sdn Bhd therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons.